

DL

Dynamic Line



MADE
IN
GERMANY

Servo Motors



KEB

Dynamic Line

SOFTWARE

HMI

CONTROL

DRIVES



MOTORS

2

COMBIVIS studio HMI
COMBIVIS studio 6
COMBIVIS connect

Internet

COMBIVIS studio HMI
COMBIVIS studio 6
COMBIVIS connect



C6 HMI

C6 HMI LC

C6 Router

Ethernet


Safety PLC & IO

C6 RIO

C6 IPC



C6 SMART

EtherCAT





FSOE

H6 Multi-axis-System




EtherCAT



G6 Inverter

S6 Servo Drive

DL3 PM Motor



AC Gear Motor

Contents

Page

System description

3

Dynamic Line DL3

4

Planetary gears, Motor- and Encoder cables

6

Dynamic Line DL2

8

Geared servo motors TA

10

Adresses

12

From the user interface to the rotating movement - it is our goal to make sure:
we provide all the tasks you require from a single supplier.

KEB drive controllers have proven themselves in the market for many years. Now we have expanded our range to provide an all-in-one package. The core control function is provided with IPC based control technology, along with software tools, a flexible range for visualisation, and remote maintenance.

Optimum rotating movement is provided by the KEB Servo motors, which are available in three series, each with specific benefits. With Energy efficiency ratings significantly above IE4 (three-phase asynchronous motors) there is a strong argument in favour of synchronous drive systems.

Real time process control is also possible in combination with the KEB COMBIVERT Drive Controller.

The package is complimented with pre-fabricated motor and encoder cables. This allows easy installation, fast start-up and safe operation.

Select the right motor for your optimum drive solution from a portfolio that is tailored to meet your specific requirements.

Dynamic Line DL 3 economical, durable, powerful



Dynamic Line DL 2 for special requirements



Series TA optimized for the geared motor solution



*Optimally coordinated features -
the key to success*

Economical, durable, powerful



A_SMH	0.5	1.2
B_SMH	1.38	3.22
C_SMH	2.45	5.65
D_SMH	4.9	11.4
E_SMH	12.8	29.0
F_SMH	31.8	72.6

Stall torque in Nm


Dynamic Line DL 3


With six physical design sizes and three alternative lengths, this new series covers application areas from the infeed axis to the main drive.

4

A high degree of density gives excellent peak torques in compact dimensions, whilst built-in modularity offers a flexible solution for the widest variety of tasks. The broad speed range provides the basis for minimal variation and universal use. Dynamic Line DL 3 series motors create an excellent base for high-performance machines and systems, capable of handling dynamic applications and high loads

General speed-torque characteristic

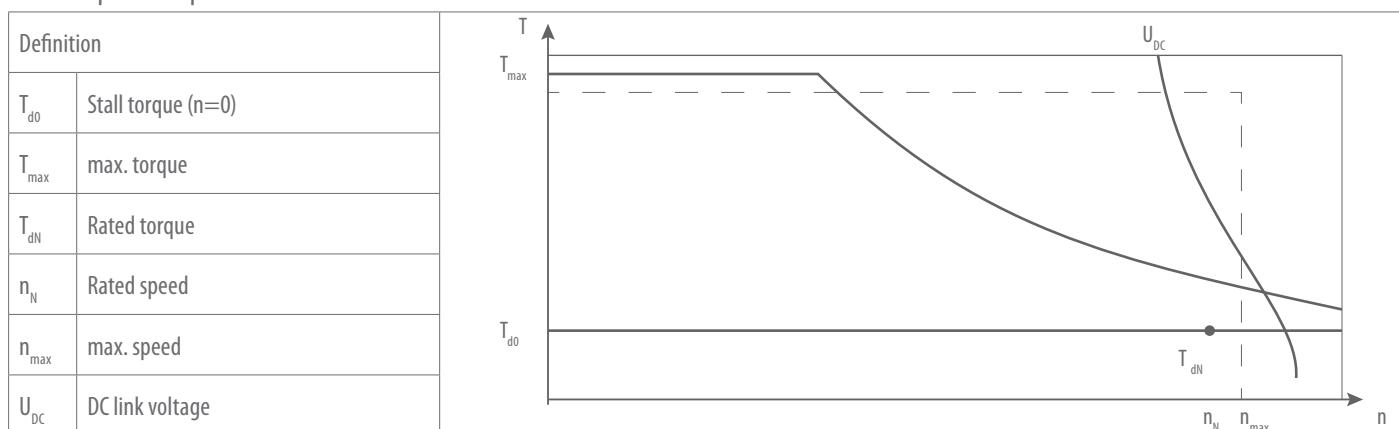

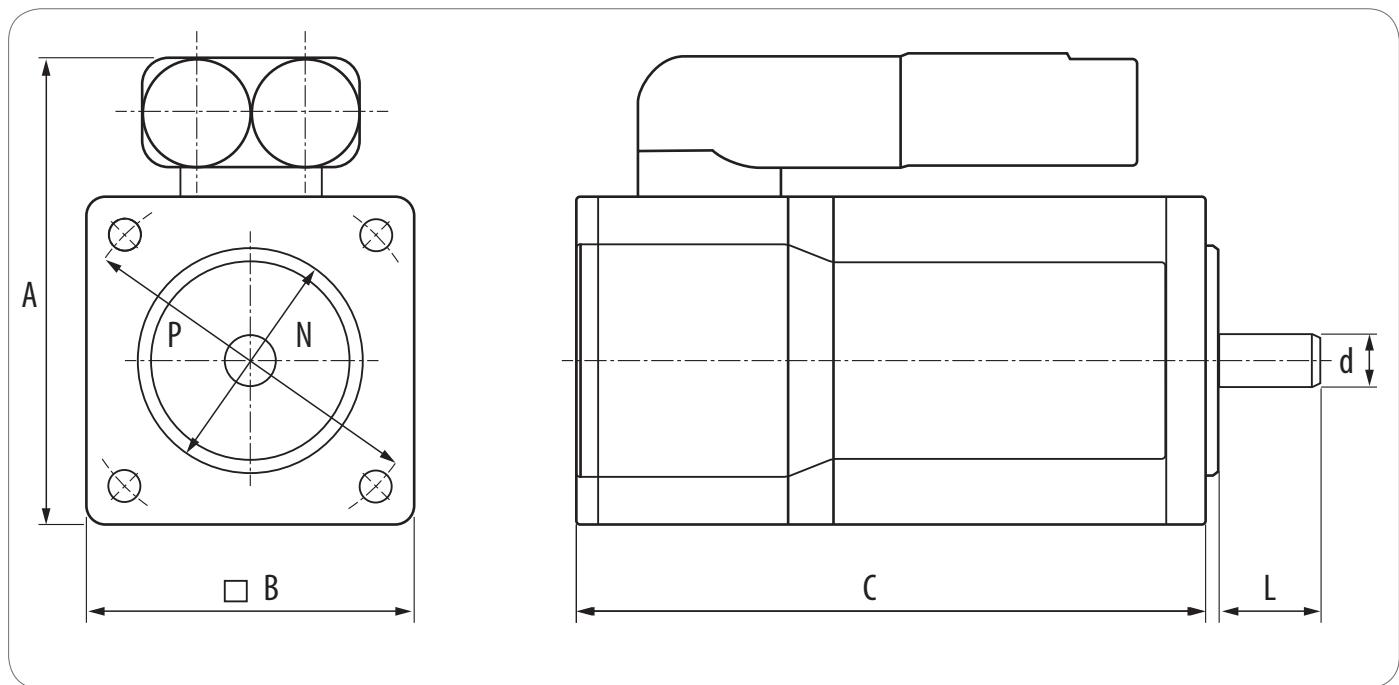

Motor	T_N [Nm]	T_0 [Nm]	T_{max} [Nm]	n_N [rpm]	J_L [kgcm ²]	A [mm]	B □ [mm]	C (without brake) [mm]	C (with brake) [mm]	d_{k6} Ø [mm]	L [mm]	N_{j6} Ø [mm]	P Ø [mm]	T_{Brake} [Nm]
A1SMH	0.5	0.5	2.69		0.134			111.5	146					
A2SMH	0.7	0.8	4.18	8,000	0.253	82.5	58	133.5	168	9	20	40	63	2.0
A3SMH	1.0	1.2	6.36		0.373			155.5	190					
B1SMH	1.33	1.38	6.07		0.462			129	168					
B2SMH	2.2	2.37	11.6	6,000	0.842	96.5	72	154	194	14	30	60	75	2.0
B3SMH	2.7	3.22	17.71		1.22			180	229					3.5
C1SMH	2.31	2.45	9.14	6,000	1.08			132	179.5					
C2SMH	3.7	4.1	18.9	5,000	1.98	128.5	87	162	209.5	19	40	80	100	9.0
C3SMH	4.9	5.65	29.25	5,000	2.87			192	239.5					
D1SMH	4.4	4.9	17.76	5,000	2.23			136.5	183.5					
D2SMH	6.9	8.2	35.34	4,000	4.06	145.5	104	169.5	216.5	24	50	95	115	9.0
D3SMH	8.35	11.4	53.13	4,000	5.88			202.5	251.5					13.0
E1SMH	11.0	12.8	37.08		13.4			176	228					
E2SMH	15.2	21.1	74.16	3,000	22.3	183.5	142	216	268	32	58	130	165	20.0
E3SMH	13.2	29.0	110.84		34.9			256	315					30.0
F1SMH	19.5	31.8	79.81	3,000	49.6			212	284.5					
F2SMH	38.2	54.8	172.49	2,000	92.3	256	194	269	341.5	38	80	180	215	70.0
F3SMH	38.8	72.6	275.32	2,000	134.9			326	398.5					

Encoder systems

Resolver resolution 12 bit/ revolution

Hiperface Singleturn - 17 bit/ revolution Multiturn - 12/17 bit/ revolution

Features:

right angle plug, shaft without keyway,
KTY-Sensor, protection IP 54

Options:

permanent magnet brake,
shaft with keyway

Prepared for the operation with

COMBIVERT S6


COMBIVERT F6

COMBIVERT H6

The perfect connection

Planetary gears SGPP bundled with **Dynamic Line 3:**

- ✓ low backlash
- ✓ high torque
- ✓ high efficiency (97%)
- ✓ ratio $i = 5$ up to 40
- ✓ low noise
- ✓ lifetime lubrication

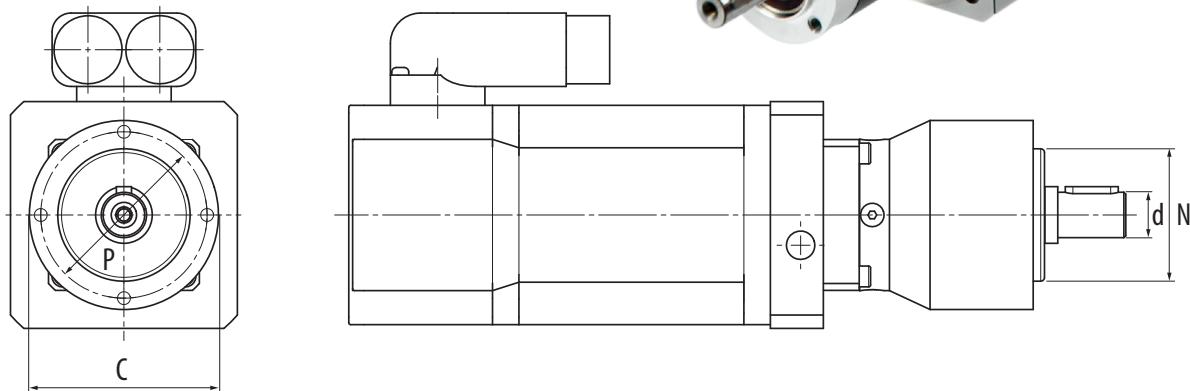


Gearsize	T_{2N}	$T_{2\max}$	n_{\max}	i	backlash arc_{\min}	C	d_{k6}	N_{j6}	P	DL3-Motors
	[Nm]	[Nm]	[rpm]			\emptyset [mm]	\emptyset [mm]	\emptyset [mm]	\emptyset [mm]	
1	5 ... 11	8 ... 17.5	5,000	5 ... 40	15	50	12	35	44	A
2	15 ... 28	24 ... 45	4,500		10	70	16	52	62	A B C
3	38 ... 85	61 ... 136	4,000		7	90	22	68	80	B C D E
4	95 ... 115	152 ... 136	3,000		7	120	32	90	108	C D E
5	210 ... 460	336 ... 736	2,800		8	155	40	120	140	D E

Industry segments

- | | |
|----------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> ✓ Machine tools ✓ Metal forming ✓ Packaging technology | <ul style="list-style-type: none"> ✓ Food technology ✓ Wood working systems ✓ General automation devices |
|----------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|

Application examples

- | | |
|---------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> ✓ Revolving tables ✓ Tool changer ✓ Roboter- and handling devices | <ul style="list-style-type: none"> ✓ Linear positioning ✓ Conveyor drives ✓ Winder |
|---------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|

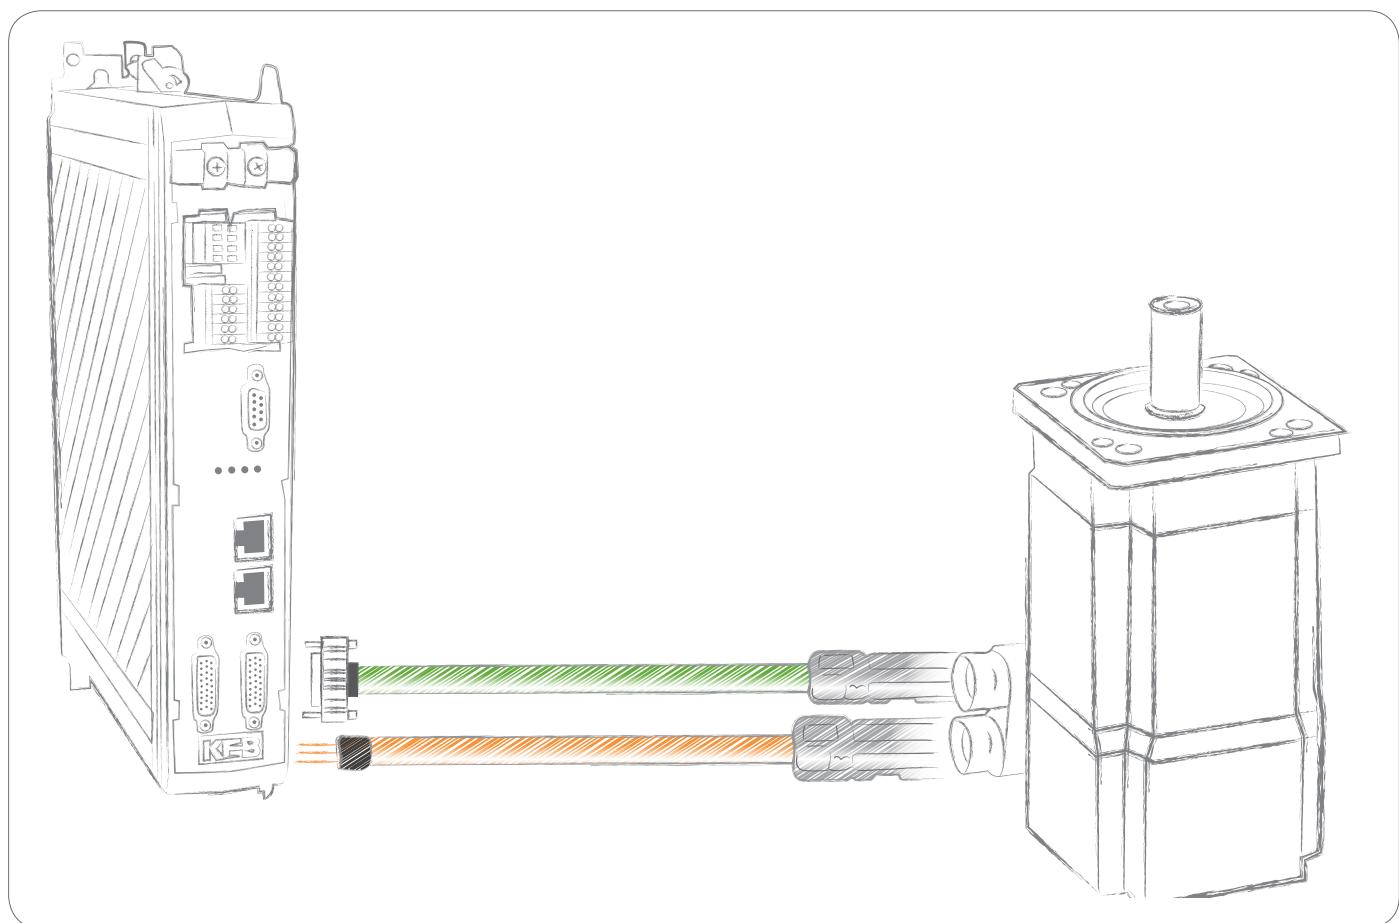

Encoder cables

Motor DL3	Encoder	Drive controller	Part-No	available length [m]
A ... F SMH	Resolver	S6	00S6L50-0xxx	1 ... 30/35 ... 50
		H6 / F6-K	00H6L50-1xxx	2.5/5/7.5/10/15 ... 50
	Hiperface SKS/SKM	S6	00S6L55-0xxx	1 ... 30/35 ... 50
		H6/F6-K	00H6L55-0xxx	2.5/5/7.5/10/15 ... 50
Motor DL2 / TA	Encoder	Drive controller	Part-No	available length [m]
SM5 SMT	Resolver	S6	00S6L50-1xxx	1 ... 30/35 ... 50
		H6 / F6-K	00H6L50-1xxx	2.5/5/7.5/10/15 ... 50
		F5	00F50C1-1xxx	2.5/5/7.5/10/15 ... 30
	BISS	S6	00S6L51-2xxx	1 ... 30/35 ... 50
		H6/F6-K	00H6L51-2xxx	2.5/5/7.5/10/15 ... 50
		F5	00F50C1-Vxxx	2.5/5/7.5/10/15 ... 30

Motor cables

Motor DL3	Drive controller	Part-No	available length [m]
A ... B SMH	S6 H6 F6-K F5	00H6L10-0xxx	1 ... 30/35 ... 50
C ... F SMH			
Motor DL2 / TA		00S4519-0xxx	
A ... F SM5 A ... F SMT			

For the special requirements



A_SM5	0.47	1.14
B_SM5	0.92	2.6
C_SM5	3.9	8.5
D_SM5	8.2	18.4
E_SM5	23.5	48.0

Stall torque in Nm

Dynamic Line DL 2

This series offers the latest motor technology in five physical design sizes.

They have been configured for tasks with a high system resolution, short designs and small build volumes, and are particularly suitable for difficult mechanical conditions such as vibration, installation, location or temperature.


8


With pre-fabricated cables and an electronic name plate (BISS) the start-up process and potential for error during installation is minimized.

The result is a high degree of availability and maximum serviceability.

General speed-torque characteristic

Definition	
T_{d0}	Stall torque ($n=0$)
T_{max}	max. torque
T_{dN}	Rated torque
n_N	Rated speed
n_{max}	max. speed
U_{DC}	DC link voltage

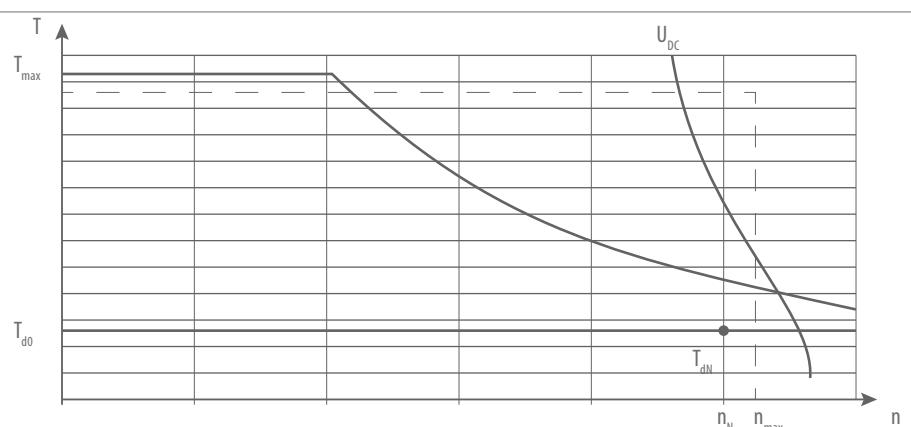

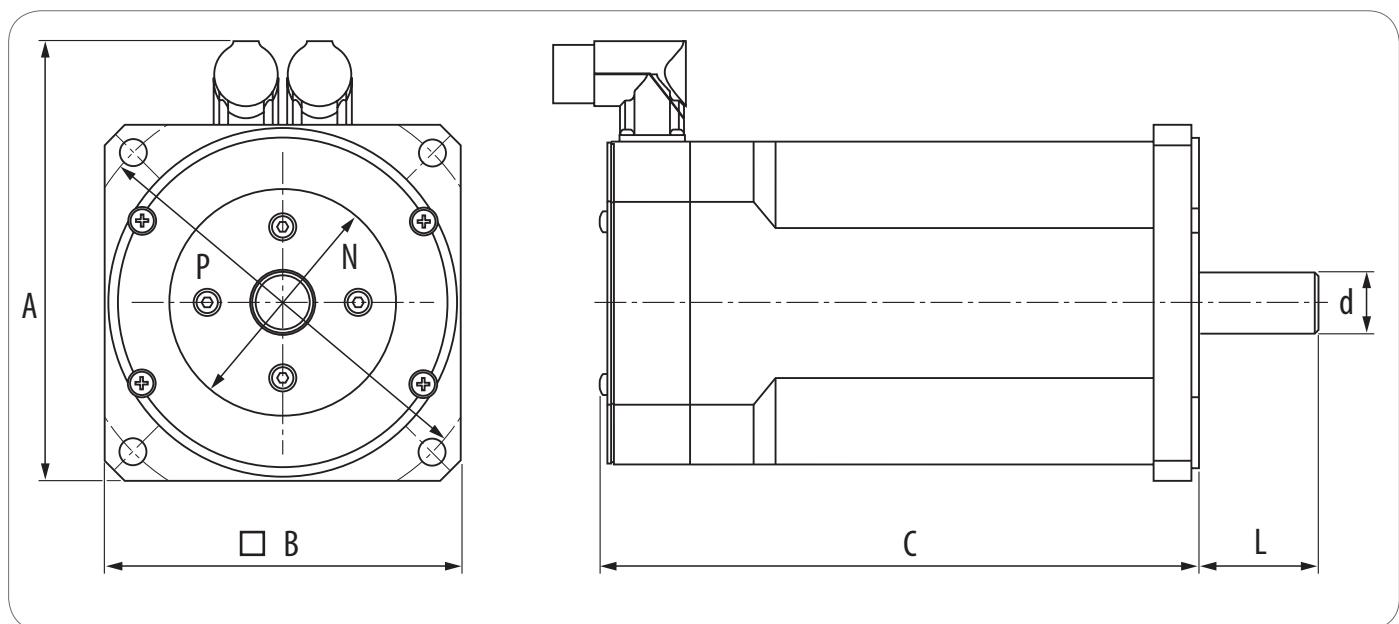

Motor	T_N	T_0	T_{max}	n_N	J_L	A	B	C (without brake)		additive	L	d _{k6}	N _{j6}	P	T _{Brake}
	[Nm]	[Nm]	[Nm]	[rpm]	[kgcm ²]	[mm]	□ [mm]	Resolver	BISS		[mm]	[mm]	Ø [mm]	Ø [mm]	[Nm]
A1SM5	0.43	0.47	2.1		0.13			121	156	25					
A2SM5	0.62	0.66	2.9	6,000	0.18	99	55	133	168	25	20	9	40	63	2.0
A3SM5	0.8	0.87	3.8		0.23			145	180	25					
A4SM5	1.05	1.14	5.0		0.34			170	205	25					
B1SM5	0.9/0.87/0.76	0.92	2.7	3,000 /	0.30			132	174	42					
B2SM5	1.83/1.75/1.5	1.8	5.4	4,000 /	0.56	117	75	158	200	42	30	14	80	100	4.5
B3SM5	2.6/2.5/2.3	2.6	7.8	6,000	0.79			184	226	42					
C1SM5	3.8/3.5/3.1	3.9	12		2.7			178	220	42					
C2SM5	5.5/4.8/4.2	5.7	17.5	2,000 / 3,000 / 4,000	3.7	137	102	206	248	42	40	19	95	115	10
C3SM5	6.9/6.4/5.7	7.1	22		4.7			234	276	42					
C4SM5	8.3/7.6/6.8	8.5	26		6.0			262	304	42					
D1SM5	25	8.2	25		7.9			203	245	42					
D2SM5	36	11.6	36	1,500 / 2,000 / 3,000 /	11.2	169	140	233	275	42	50	24	130	165	22
D3SM5	47	15.3	47		14.4			263	305	42					
D4SM5	57	18.4	57		19.5			293	335	42					
E1SM5	23/19/14	23.5	37.08	1,000 /	57			266	293	34					
E2SM5	34/28/19	35.0	74.16	2,000 / 3,000 /	79	256.5	195	294	321	34	58	32	180	215	60
E3SM5	47/40/27	48.0	110.84		102			322	349	34					

Encoder systems

Resolver

resolution 12 bit/ revolution

BISS

Singleturn - 19 bit/ revolution

Multiturn -12/19 bit/ revolution

Features:

right angle plug, shaft without keyway,
PTC-Sensor, protection IP 54

Options:

permanent magnet brake, shaft with keyway,
protection IP65 - shaft exit, with forced cooling

Prepared for the operation with


COMBIVERT F5

COMBIVERT S6

COMBIVERT F6

COMBIVERT H6

Optimised for modular gearbox

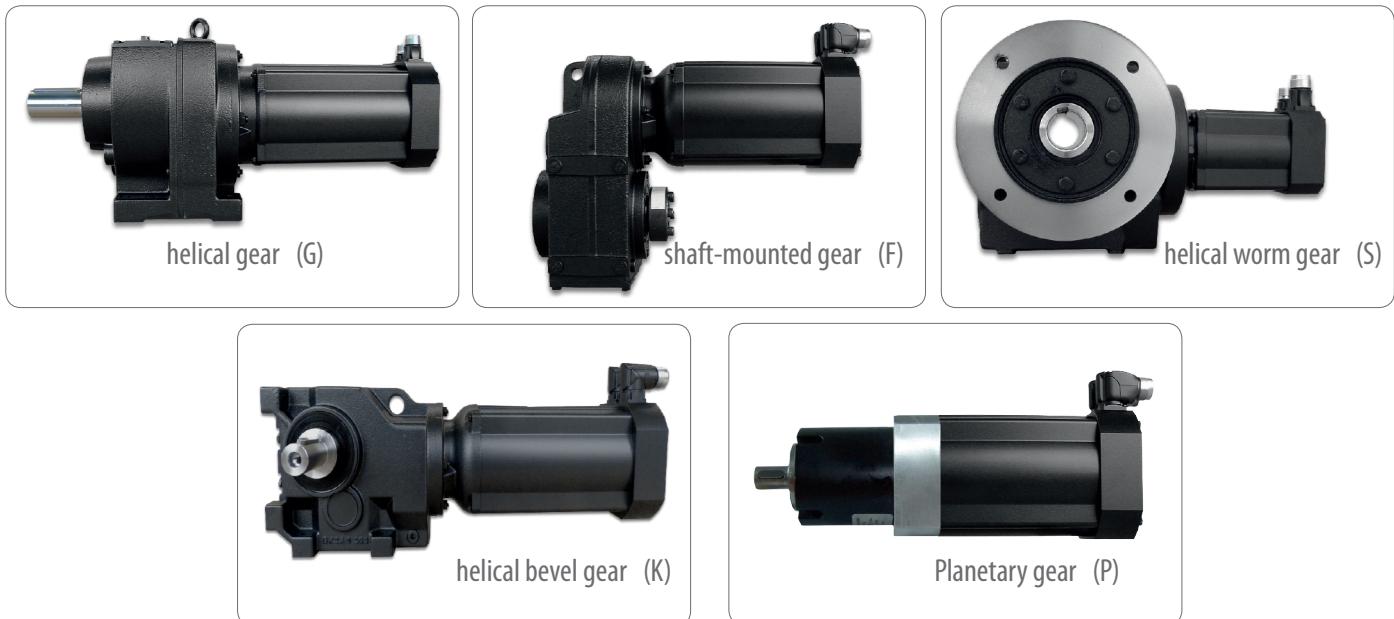

TA 3_	1,5	3,9
TA 4_	6,9	11,7
TA 5_	11,5	20,0
TA 6_		34,5 90,0

Stall torque in Nm

TA Series

Servo technology in combination with an industrial gear box module gives rise to a variety of servo geared motor types: spur, shaft-mounted helical, helical worm, helical bevel and planetary gear.

10


The direct input into the gearhead reduces the work that would otherwise be required with a conventional connection coupler, increasing efficiency and service life in a particularly compact design.

As a flexible solution from the gearhead module, the servo gear motor offers high overall efficiency and excellent dynamics, as well as reduced backlash option (on request). The TA Range offers properties such as lifetime lubrication, universal installation positions and robust mechanics.

KEB DRIVE

is our perfect software tool for geared motor selections, based on a combination of continuous torque and peak current dependent on the nominal torque.

It also provides technical data sheets, 2D and 3D engineering files as well as the ability to allocate a matching controller.

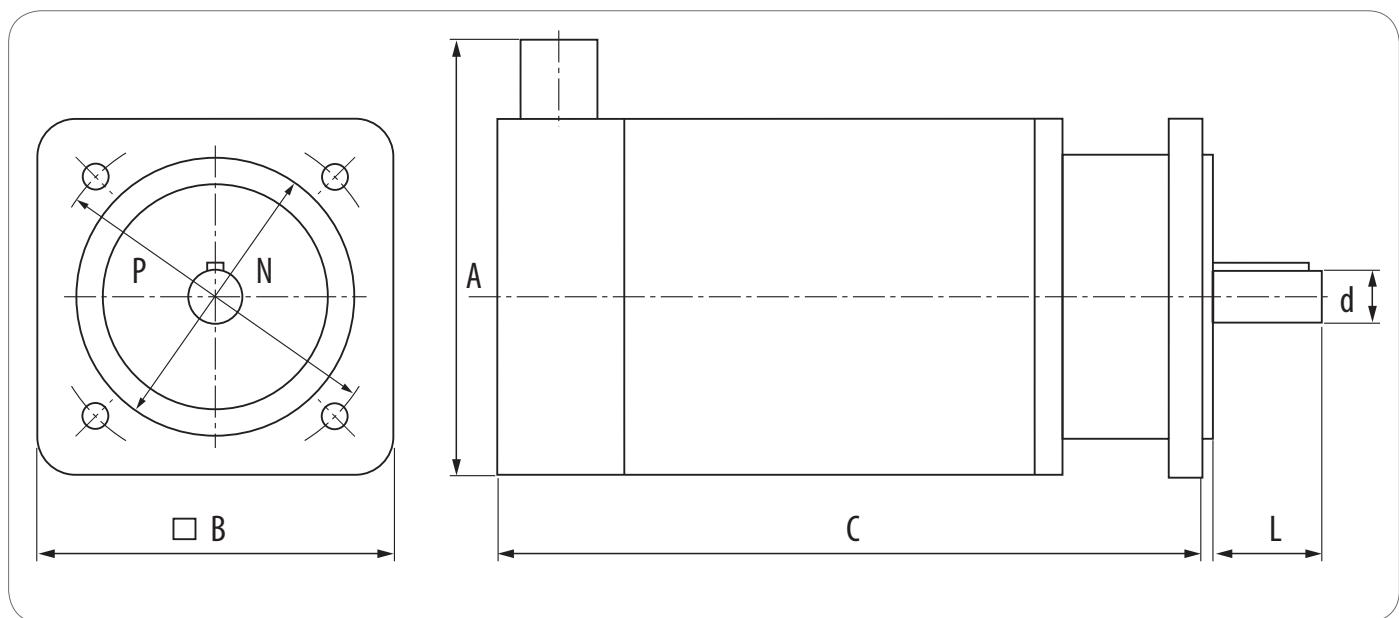

Motor	T_N	T_0	T_{max}	n_N	J_L	A	B	C	C	d_{k6}	L	N_{j6}	P	Gear (available)						
	[Nm]	[Nm]	[Nm]	[rpm]	[kgcm ²]	[mm]	□ [mm]	without brake Resolver	brake + Resolver	absolute encoder	brake + absolute encoder	Ø [mm]	[mm]	Ø [mm]	Ø [mm]	G	F	S	K	P
TA 31	1.35...1.45	1.5	4.5	3,000 / 4,500 / 6,000	0.82			181.5	216.5	201.5	236.5									
TA 32	2.15...2.55	2.75	8.25	2,000 / 3,000 / 4,500	1.51	129.5	88	216.5	251.5	201.5	271.5	14	30	80	100	■	■	■	■	■
TA 33	2.75...3.55	3.9	11.7		2.19			251.5	286.5	271.5	306.5									
TA 41	5.7...6.6	6.9	20.7	2,000 / 3,000 / 4,500	5.65			241	276	261	296									
TA 42	7.1...8.6	9.2	27.6	2,000 / 3,000 / 4,500	8.15	159.5	115.5	276	311	296	331	19	40	110	130	■	■	■	■	■
TA 43	8.6...10.8	11.7	35.1		10.65			311	346	331	366									
TA 51	9...10.8	11.5	34.5	2,000 / 3,000 / 4,500	14.9			273	308	293	328									
TA 52	11.3...14.7	16.1	48.3	2,000 / 3,000 / 4,500	21.53	189.5	145	308	343	328	363	24	50	130	165	■	■	■	■	■
TA 53	10.4...17.7	20	60		28.15			343	378	363	398									
TA 61	26...31.5	34.5	103.5		77.71			367	407	387	427									
TA 62	33...44	50	150	1,500 / 2,000 / 3,000	113.71	235	190	445	485	465	505	32	58	180	215	■	■	■	■	-
TA 63	37...55	64	192	2,000 / 3,000	149.7			515	555	535	575									
TA 63F	55...82	90	192		149.7	244		690	730	690	730									

Encoder systems

Resolver

resolution 12 bit/ revolution

BISS

Singleturn - 9 bit/ revolution

Multiturn - 2/19 bit/ revolution

Features:

straight plug, shaft with keyway,
PTC-Sensor, protection IP 54

Options:

permanent magnet brake, right angle plug,
KTY-Sensor

Prepared for the operation with

COMBIVERT F5

COMBIVERT S6

COMBIVERT F6

COMBIVERT H6

Headquarter

KEB - Karl E. Brinkmann GmbH

Försterweg 36 - 38 • D - 32683 Barntrup
Telefon +49 5263 401-0 • Telefax 401-116
Internet: www.keb.de • E-Mail: info@keb.de

KEB Antriebstechnik GmbH • Geared Motors
Wildbacher Straße 5 • D - 08289 Schneeberg
Telefon +49 3772 67-0 • Telefax 67-281
Internet: www.keb-drive.de • E-Mail: info@keb-drive.de

Companies

AUSTRIA

KEB Antriebstechnik
Austria GmbH
Ritzstraße 8
A - 4614 Marchtrenk
Tel: +43 7243 53586-0
Fax: +43 7243 53586-21
E-Mail: info@keb.at
Internet: www.keb.at

CHINA

KEB Power Transmission
Technology (Shanghai) Co. Ltd.
No. 435 QianPu Road
Songjiang East Industrial Zone
CN-201611 Shanghai, PR. China
Tel: +86 21 37746688
Fax: +86 21 37746600
E-Mail: info@keb.cn
Internet: www.keb.cn

FRANCE

Société Française KEB
Z.I. de la Croix St. Nicolas
14, rue Gustave Eiffel
F - 94510 LA QUEUE EN BRIE
Tel: +33 149620101
Fax: +33 145767495
E-Mail: info@keb.fr
Internet: www.keb.fr

Further partners for ...

Australia • Belgium • Bulgaria • Czech Republic • Denmark • Egypt • Greece • Hungary • India • Indonesia • Iran • Israel • Malaysia • Morocco
• Netherlands • New Zealand • Pakistan • Poland • Portugal • Romania • Singapore • Slovakia • South Africa • Spain • Sweden • Switzerland •
Taiwan • Thailand • Tunisia • Turkey • Uzbekistan

GREAT BRITAIN

KEB (UK) Ltd.
Morris Close
Park Farm Industrial Estate
GB - Wellingborough
NN8 6 XF
Tel: +44 1933 402220
Fax: +44 1933 400724
E-Mail: info@keb.co.uk
Internet: www.keb.co.uk

ITALY

KEB Italia S.r.l. Unipersonale
Via Newton, 2
I - 20019 Settimo Milanese (Milano)
Tel: +39 02 3353531
Fax: +39 02 33500790
E-Mail: info@keb.it
Internet: www.keb.it

JAPAN

KEB - Japan Ltd.
15 - 16, 2 - Chome
Takanawa Minato-ku
J - Tokyo 108 - 0074
Tel: +81 33 445-8515
Fax: +81 33 445-8215
E-Mail: info@keb.jp
Internet: www.keb.jp

RUSSIA

KEB CIS ZAO
Lesnaya str, house 30
Dzerzhinsky (MO)
RUS - 140091 Moscow region
Tel: +7 495 6320217
Fax: +7 495 6320217
E-Mail: info@keb.ru
Internet: www.keb.ru

USA

KEB America, Inc
5100 Valley Industrial Blvd. South
USA - Shakopee, MN 55379
Tel: +1 952 2241400
Fax: +1 952 2241499
E-Mail: info@kebamericacom
Internet: www.kebamericacom

Representative offices

- Belgium
- Brazil
- Korea
- Spain

